


# HME430

HY-MAX 스퀘어엔드밀4날 헬릭스30°

HY-MAX Square End Mill 4-Flute Helix30°

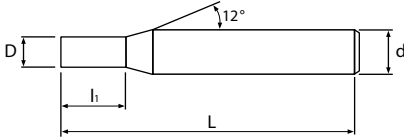

\* 적용피삭재(Applicable Work Material)  
: 최적(Most Suitable)  
: 가능(Applicable)

CARBIDE ULTRA
TiSiN
4
30° Helix
Multi Helix
D 0/-0.008
D 0/-0.015
Shank h5

D≥2 D<6

D≥6

P			H			M	S	N		
탄소강 Carbon Steels	합금강 Alloy Steels	프리하든강 Pre-Hardened Steels	열처리강 Hardened Steels			스테인레스강 Stainless Steels	내열합금강 Heat-resistant alloys	동 Copper	알루미늄합금 Aluminum Alloys	흑연 Graphite
S45C/S50C ~800 N/mm <sup>2</sup>	SCM ~35HRC	NAK/HPM ~45HRC	SKD61 ~55HRC	SKD11 ~60HRC	SKH ~62HRC					

단위(mm)/Unit(mm)

모델번호 Model No.	인선직경 Dia of Mill	날장 Length of Cut	전장 Overall Length	샹크경 Shank Dia	비고 Remark
	D	I <sub>1</sub>	L	d	
HME430-010025-050-S04	1	2.5	50	4	
HME430-010025-050-S06	1	2.5	50	6	
HME430-01504-050-S04	1.5	4	50	4	
HME430-01504-050-S06	1.5	4	50	6	
HME430-02006-050-S04	2	6	50	4	
HME430-02006-050-S06	2	6	50	6	
HME430-02508-050-S04	2.5	8	50	4	
HME430-02508-050-S06	2.5	8	50	6	
HME430-03008-050-S03	3	8	50	3	
HME430-03008-050-S04	3	8	50	4	
HME430-03008-050-S06	3	8	50	6	
HME430-04010-050-S04	4	10	50	4	
HME430-04010-050-S06	4	10	50	6	
HME430-05015-060-S06	5	15	60	6	
HME430-06015-060-S06	6	15	60	6	
<span style="color:red">NEW</span> HME430-06015-075-S06	6	15	75	6	
HME430-07020-065-S08	7	20	65	8	
HME430-08020-065-S08	8	20	65	8	
HME430-10025-070-S10	10	25	70	10	
HME430-11030-080-S12	11	30	80	12	
HME430-12030-080-S12	12	30	80	12	
HME430-16040-100-S16	16	40	100	16	