


DME430

DIA-MAX 스퀘어엔드밀4날 헬릭스30°

DIA-MAX Square End Mill 4-Flute Helix30°

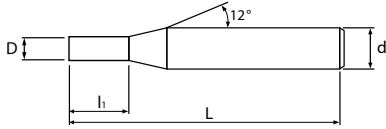

* 적용 피삭재(Applicable Work Material)
: 최적(Most Suitable)
: 가능(Applicable)

D≥1

P			H			M	S	N		
탄소강 Carbon Steels	합금강 Alloy Steels	프리하든강 Pre-Hardened Steels	열처리강 Hardened Steels			스테인레스강 Stainless Steels	내열합금강 Heat-resistant alloys	동 Copper	알루미늄합금 Aluminum Alloys	흑연 Graphite
S45C/S50C ~800 N/mm ²	SCM ~35HRC	NAK/HPM ~45HRC	SKD61 ~55HRC	SKD11 ~60HRC	SKH ~62HRC					

단위(mm)/Unit(mm)

모델번호 Model No.	인선직경 Dia of Mill	날장 Length of Cut	전장 Overall Length	샤프크경 Shank Dia	비고 Remark
	D	l ₁	L	d	
DME430-01003-050-S04	1	3	50	4	
DME430-01504-050-S04	1.5	4	50	4	
DME430-02006-050-S04	2	6	50	4	
DME430-03012-060-S06	3	12	60	6	
DME430-04016-060-S06	4	16	60	6	
DME430-05020-070-S06	5	20	70	6	
DME430-06020-070-S06	6	20	70	6	
DME430-08024-070-S08	8	24	70	8	
DME430-10025-080-S10	10	25	80	10	
DME430-12025-080-S12	12	25	80	12	

DIA-MAX

볼
Ball

라디우스
Radius

스퀘어
Square